


### 160 Series Operating Up to 32 GHz

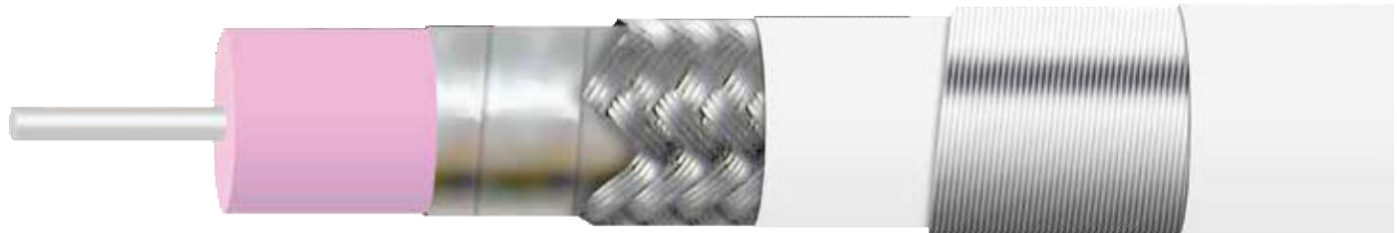

Center Conductor	Dielectric	Foil	Braid	Outer Jacket	Serving SCCS Armor	Outer Jacket
Silver Plated Copper	PTFE (4.8mm 0.160")	Silver Plated	Silver Plated	FEP 1601/1603		5.8mm FEP
1606/1608 Stranded Copper						

	1601	1606	1603	1608
<b>Electrical Characteristics</b>				
Impedance	50 +/- 2%	50 +/- 2%	50 +/- 2%	50 +/- 2%
Cut Off Frequency (cable only, max)	32 GHz	32 GHz	32 GHz	32 GHz
Capacitance	29 pF/ft.	22 pF/ft.	29 pF/ft.	22 pF/ft.
Velocity of Propagation	71%	71%	71%	71%
Time Delay	1.4 ns/ft.	1.4 ns/ft.	1.4 ns/ft.	1.4 ns/ft.
Shielding Effectiveness up to 18GHz	>90 dB	>90 dB	>90 dB	>90 dB
Power Handling	See Chart	See Chart	See Chart	See Chart

<b>Mechanical Characteristics:</b>				
Weight	.48 oz/ft (44g/m)	0.5 oz/ft (13g/m)	0.98oz/ft (92g/m)	0.98oz/ft (92g/m)
Minimum Bend Radius inches (mm)	0.325" (8.3mm)	0.325" (8.3mm)	0.375" (9.5mm)	0.375" (9.5mm)

<b>Environmental Characteristics:</b>				
Operating Temperature Range <sup>1</sup>	-65°C to +165°C	-65°C to +165°C	-65°C to +165°C	-65°C to +165°C
RoHS (2002/95/EC)	Available on request	Available on request	Available on request	Available on request

<sup>1</sup>+200°C available on request

VSWR for assemblies with two straight connectors	1.35:1 to 18 GHz	1.35:1 to 18 GHz	1.35:1 to 18 GHz	1.35:1 to 18 GHz
VSWR for assemblies with one straight and one right angle connector	1.40:1 to 18 GHz	1.40:1 to 18 GHz	1.40:1 to 18 GHz	1.40:1 to 18 GHz
VSWR for assemblies with two right angle connectors	1.45:1 to 18 GHz	1.45:1 to 18 GHz	1.45:1 to 18 GHz	1.45:1 to 18 GHz

## 160 Series

### Insertion Loss

GHz	1601/1603			1606/1608		
	dB/ft.	dB/m	Power(W) @ 20°C @ Sea Level	dB/ft.	dB/m	Power(W) @ 20°C @ Sea Level
0.04	0.07	0.22	700	0.08	0.25	625
1	0.11	0.36	500	0.12	0.40	446
2	0.16	0.53	350	0.18	0.59	313
4	0.24	0.78	240	0.27	0.88	214
6	0.30	0.99	190	0.34	1.11	170
8	0.36	1.18	160	0.40	1.32	143
10	0.41	1.36	150	0.46	1.52	134
12	0.46	1.52	140	0.52	1.70	125
14	0.51	1.68	130	0.57	1.88	116
16	0.56	1.83	120	0.62	2.04	107
18	0.60	1.97	110	0.67	2.21	98
20	0.64	2.11	100	0.72	2.36	89
22	0.68	2.25	90	0.77	2.52	80
24	0.73	2.38	80	0.81	2.66	71
26	0.77	2.51	70	0.86	2.81	63
28	0.80	2.64	60	0.90	2.95	54
30	0.84	2.76	50	0.94	3.09	45
32	0.88	2.89	40	0.99	3.23	36

